


Product Details

VAL-BIO700

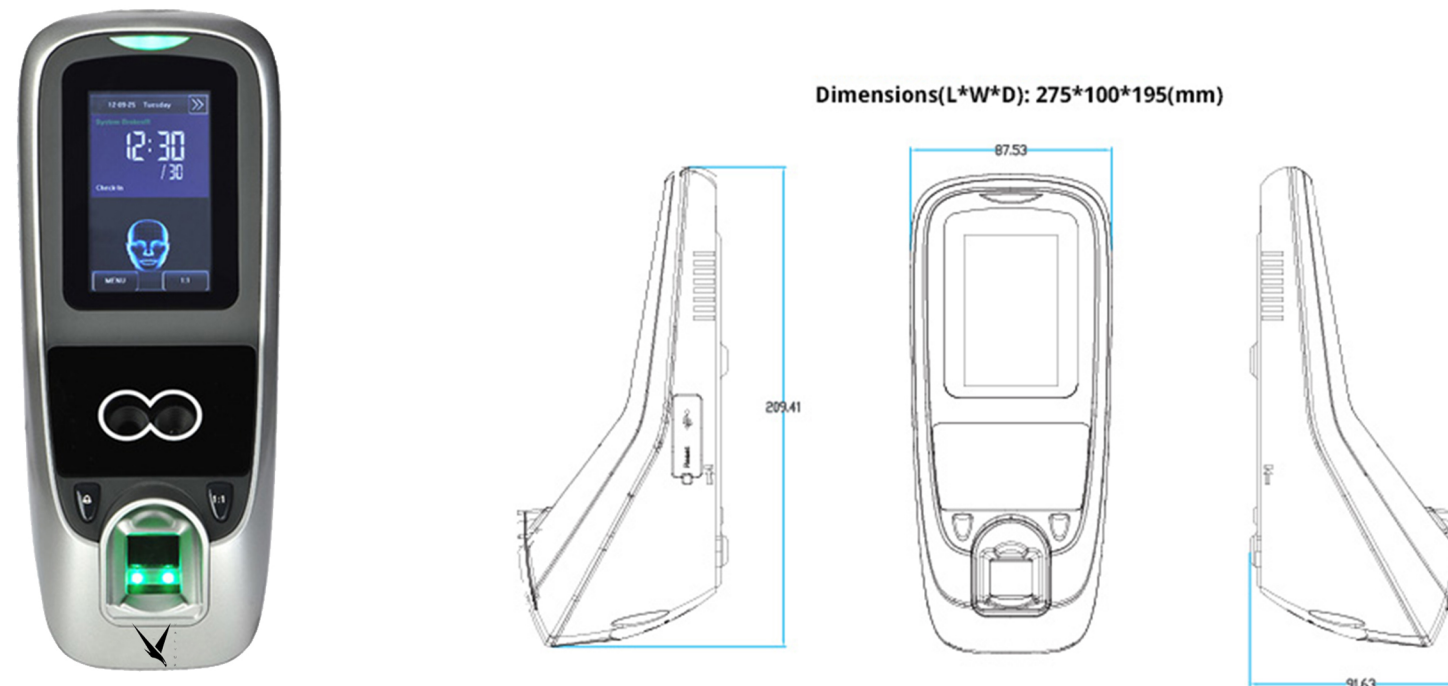

Multi-biometric Identification Access Control and Time & Attendance

Capacity Storage: Store 1,500 face, 2,000 fingerprint, 100,000 transactions.
Communication: TCP/IP,RS232/485,USB-host.
Support Time & Attendance and Access Control



3-inch Touch Screen
3-inch Touch Screen is user-friendly and very intuitive.



Built-in Phonetic Function
Prompt audio acceptance or rejection signals for valid or invalid.




Wiegand Input & Output
Support standard Wiegand signal. Wiegand input & output.



LED Status Indicators
LED indicators acceptance or rejection signals for valid or invalid.



Doorbell Button
The doorbell button and interface: buttons and isolation circuit, connect to any external bell.



Network Communication
TCP/IP,RS232/485,USB-host.



USB Communication
Support U disk data upload and download.



Opening Mode
Face,Fingerprint,ID Card(optional).



Capacity Storage
Stores 1,500 faces and 2000 fingerprint templates, 100,000 transactions.



Anti-tamper and Alarm
Tamper alarm, Illegal door alarm, Door did not shut the alarm and Hijack alarm, And can output an alarm trigger signal, Can external alarm, warning light or alarm host.



New Generation Multiple Biometric Identification

Integrating with Face, Fingerprint and PIN recognition and optional with RFID mode.



3-inch Touch Screen

3-inch Touch Screen is user-friendly and very intuitive.

Full Access Control Features

Anti-passback.
Access control interface for 3rd party electric lock, door sensor, exit button, alarm and doorbell.



Doorbell Button

The doorbell button and interface: buttons and isolation circuit, connect to any external bell.



1:1 Screen Keyboard Shortcuts

Gently press the 1:1 button, screen synchronized display keyboard, feature-rich.



Easily Manage Data

Users can easily manage data by networking Multi-Bio700 via TCP/IP, RS232/485, USB Host, Wiegand input & output.



Secure Data Management


The Multi-Bio700 also includes a USB port for offline data backup/management.



Anti-tamper and Alarm

Tamper alarm, Illegal door alarm, Door did not shut the alarm and Hijack alarm, And can output an alarm trigger signal, Can external alarm, warning light or alarm host.

Configuration

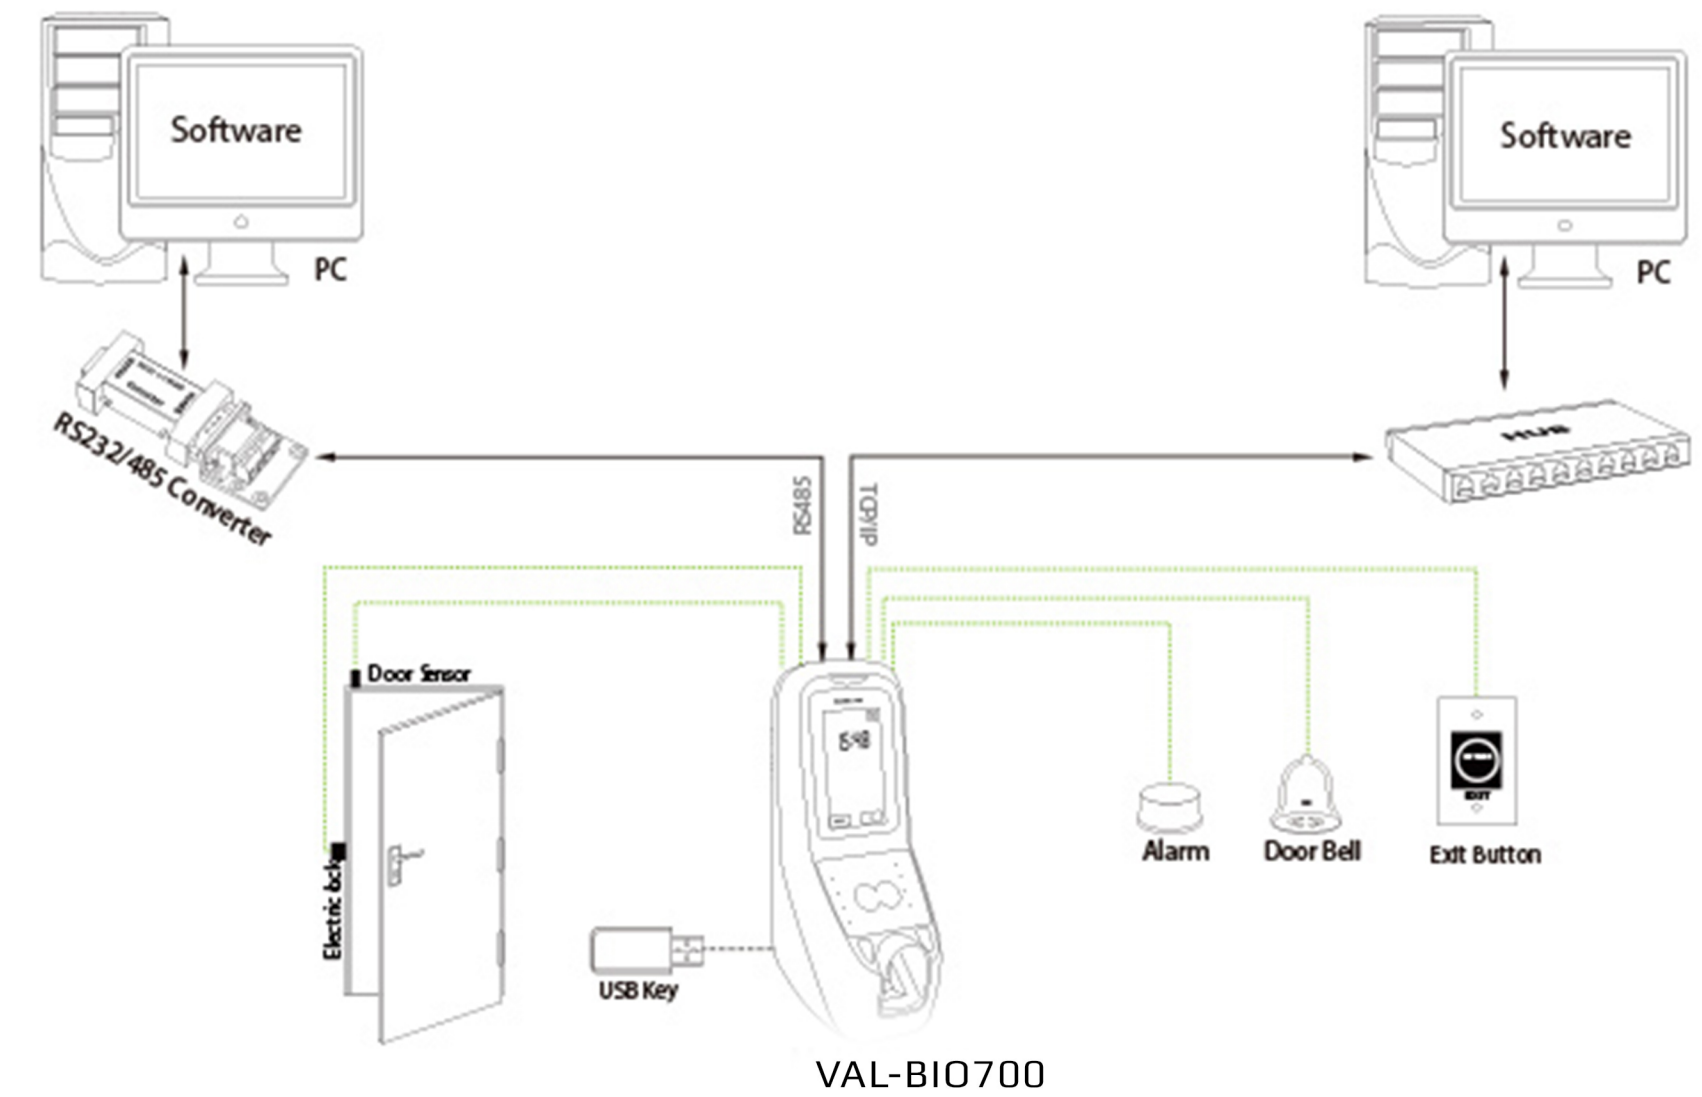



Fast and Accurate Fingerprint and Facial Identification Algorithm

- 1 stand or 1 touch a second user recognition**
- . Stores 1500 faces and 2000 fingerprint templates**

Multiple Verification Modes

2.20 verification modes are available to improve security level. Default verification modes are Fingerprint only, Face only or RFID only Other 19 modes are available.

Easy Installation and Connectivity

- 1.Wiegand input & output.**
- 2.Network interface by TCP/IP or RS485**

Full Access Control Features

- 1.Anti-passback.**
- 2.Access control interface for 3rd party electric lock, door sensor, exit button, alarm and doorbell**
- 3.Good Performance in Dark Environment**
- 4.Infra-red optical system enables machine to work well at night.**

Model	Multi-Bio700 Multi-Biometric Professional Access Control Terminal
Face capacity	1500
Fingerprint Capacity	2000
ID Card capacity	10000(optional function)
Logs capacity	100,000
2000mAh Backup Battery	N/A
Display	3 Inch Touch Screen
Communication	TCP/IP,RS232/485,USB-host,WiFi(optional)
Access Control Interfaces for	3rd party electric lock, door sensor, alarm, wired bell and exit button
Wiegand Signal	Wiegand in and out
Optional Functions	ID Card, Mifare card
Power Supply	12V/3A
Dimension	275*100*195mm
Gross weight	1.5kg